




**TYPICAL PERFORMANCE CHARACTERISTICS**

Standard Test Conditions: +25°C, LO Input = +15 dBm, RF input = 0 dBm @ LO+30 MHz

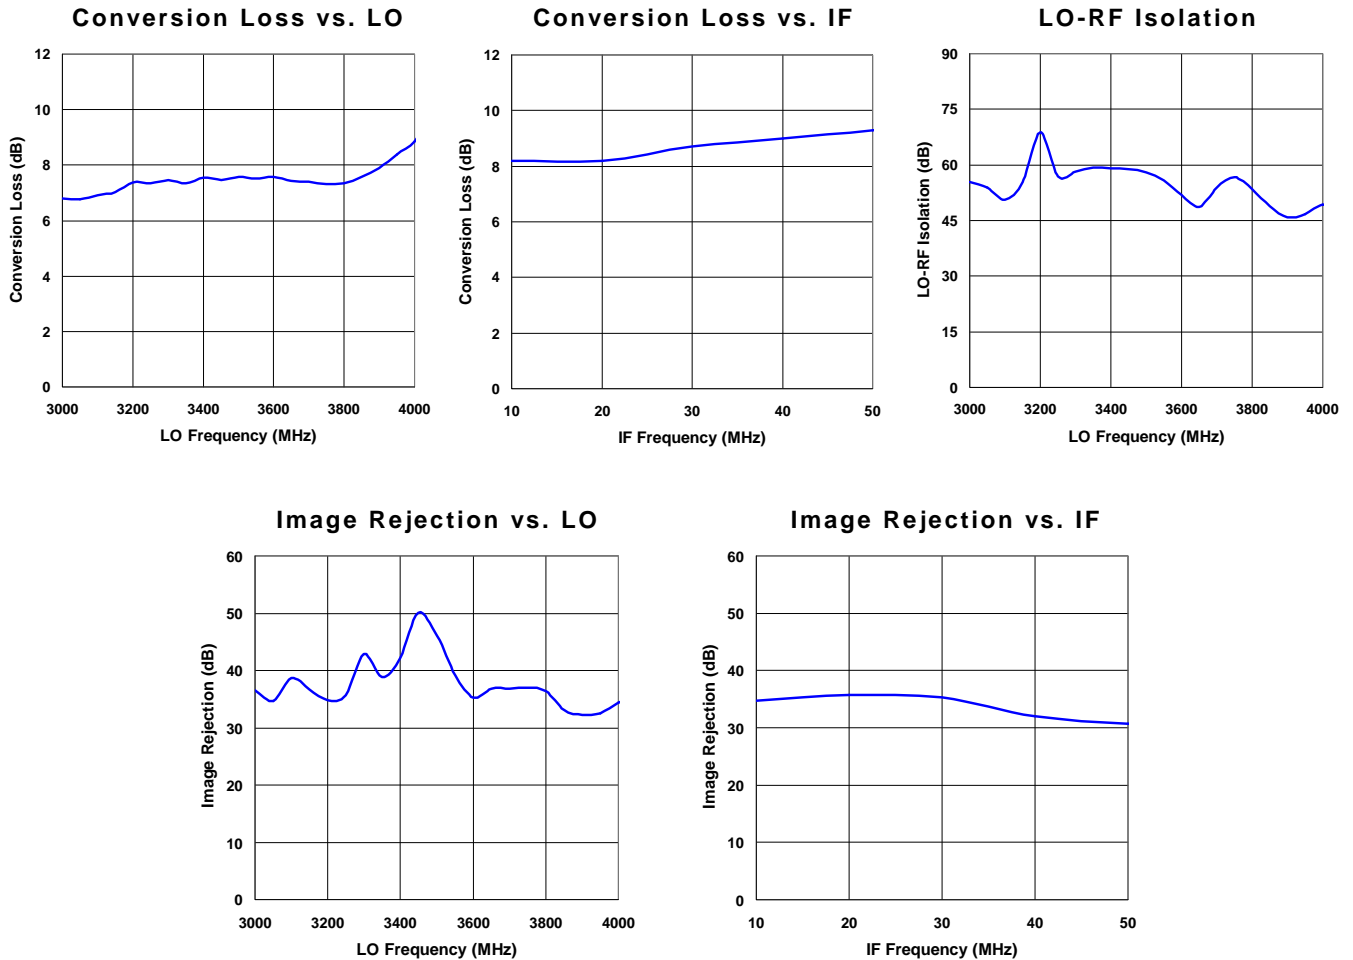

**CASE DRAWING**

